


Bristolite's Industrial Skylights

Fiberglass Fixed Steel Skylight Model SS

The Fiberlite® fiberglass skylights are intended primarily for industrial applications. Our specially formulated resin is fire retardant, highly translucent, color stable, resistant to heat distortion and provides excellent filtration of ultra-violet. An isothalic gelcoat forms a glass-like finish on our skylight which is highly resistant to chemicals, crazing and cracking. It is also light stabilized and has increased ultra-violet and infrared resistance.

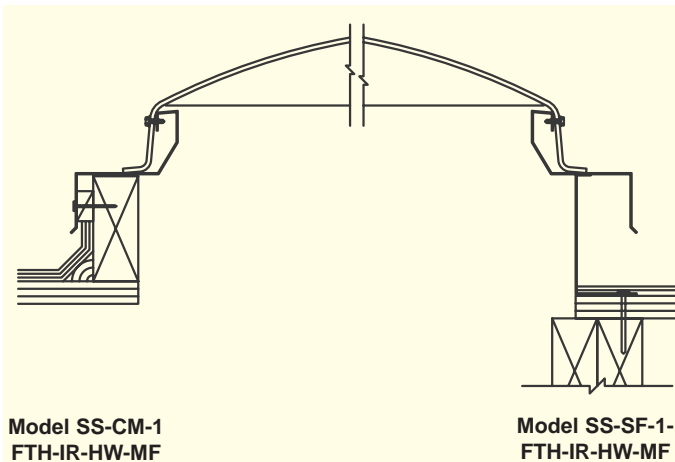

Model SS-CM-1
FTH-IR-HW-MF

Model SS-SF-1
FTH-IR-HW-MF

Typical Self-Flashing and Curb Mount Details

Specifications: Fiberglass Skylights shall be No. H_____ as manufactured by Bristolite Skylights, Santa Ana, Calif. The fiberglass dome shall be a molded one-piece unit with integral counterflashing skirt to eliminate any dependence on gaskets, sealants or flow-through designs. Fiberglass shall consist of neopentyl glycol isothalic gelcoat laminate with an acrylic modified polyester based resin and silene glass fiber. The frame is fabricated of galvanized steel and shall be installed either on a 1½" wide curb furnished by others or on its own 4" high self-flashing curb fabricated from galvanized steel with a 2-¾" roof flange. Materials are to be self-extinguishing Approved Plastic Rated CC-1. All units are guaranteed against defective workmanship and material.

Standard Features Include:

1. **Curb-Mounted** (specify by adding **CM** to model description) or **Self-Flashing** (specify by adding **SF** to model description)
2. **High Wind Resistant** - Can withstand high wind conditions

Options

1. **Security Grills** (for specific information see our product information for Security Grills)
2. **Insulating Double Domes** (Specify by adding **2** to the model description)
3. Self-Flashing **Bases of 9" or 12"** (specify by adding **9** or **12** to the description)
4. **Insulated Self-Flashing Base** (specify by adding **INS** to model description)

Model Description

SS	Fixed Fiberlite Skylight
CM	Curb Mount Frame
SF	4" Self-Flashing Frame
1	Single Non-Insulated Dome
FTH	Fiberglass Translucent High
IR	Impact Resistant
HW	High Wind
MF	Mill Finish

Available Sizes

Model Number	Inside Curb Opening
H4896-SS	48" x 96"