


Bristolite's Industrial Skylights

Fiberglass Steel Frame Louvered Skylight Dome Model SSL

The Fiberglass Steel Framed Ventilator Domes, manufactured with cost saving galvanized steel, are skylights with maximum ventilating capacity consistent with moisture resistant design and low profiles.

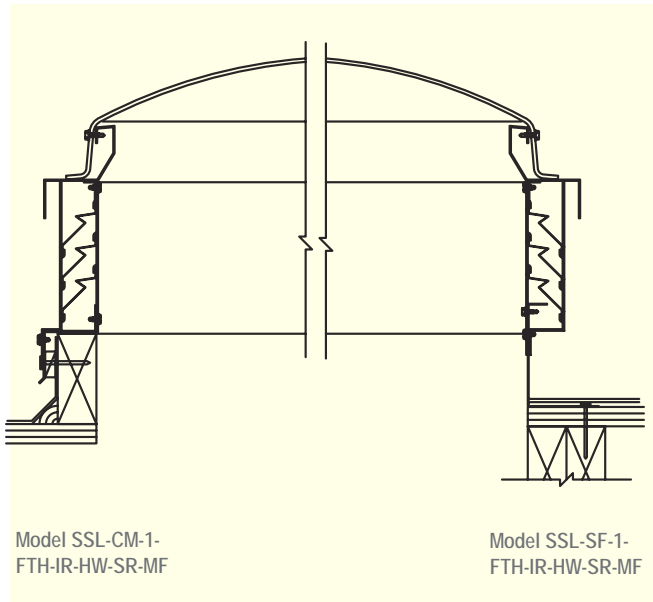

Typical Curb Mount and Self-Flashing Details

Specifications: Louvered Fiberglass Skylights shall be No.H____ as manufactured by Bristolite Skylights, Santa Ana, Calif. The fiberglass dome shall be a molded one piece unit with integral counterflashing skirt to eliminate any dependence on gaskets, sealants or flow-through designs. The Fiberglass shall consist of neopentyl glycol isothalic gelcoat laminate with an acrylic modified polyester based resin and silene glass fiber. The fiberglass dome comes attached to a louvered frame. The louvers will be fixed storm resistant louver blades of 22 gauge galvanized steel and shall be continuous. The louvered frame is attached to a base frame of 20 gauge galvanized steel and shall be installed either on a 1-1/2" wide curb furnished by others or on its own 4" high self-flashing curb fabricated from 20 gauge galvanized steel with a 2-3/4" roof flange. Materials are to be self-extinguishing Approved Plastic Rated CC-1. All units are to be guaranteed against defective workmanship and materials.

Standard Features Include:

1. High Wind Resistance - Can withstand high wind conditions.
2. Curb-Mounted (specify by adding **CM** to model description) or Self-Flashing (specify by adding **SF** to model description)
3. SR Single Storm Resistant Louvers

Options

1. Dust Filters (specify by adding **DF** to model description)
2. Insect Screens (specify by adding **IS** to model description)
3. Bird Screens (specify by adding **BS** to model description)
4. Rain Guard (specify by adding **RG** to model description)
5. Security Grills (for specific information see our product information for Security Grills)

Model Description

SSL	Galvanized Steel Skylight Louvered
CM	Curb Mount Frame
SF	Self-Flashing Frame
1	Single Non-Insulated Dome
FTH	Fiberglass Translucent (High)
IR	Impact Resistant
HW	High Wind
SR	Storm Resistant Louver Blade
MF	Mill Finish

Available Sizes

Model Number	Inside Curb Opening	Amount of Free Air Space
H4896-SSL	48" x 96"	9 square feet